


# INDUSTRY STANDARD CLASS 125 SLIP-ON

*COMMONLY REFERRED TO AS A CLASS 150 IN LARGE DIAMETER FLANGES*

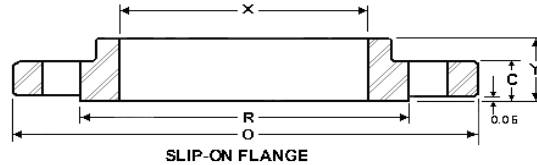

Nominal Size	Outside Diameter	Thickness	Length thru Hub	Diameter of Hub	Diameter of Raised Face	Inside Diameter	Diameter of Bolt Circle	Number of Bolt Holes	Diameter of Bolt Holes	Weight (Lbs)
	O	C	Y	X	R	B				
26	34.25	2.00	3.38	28.50	29.50	26.19	31.75	24	1.38	235
28	36.50	2.06	3.44	30.75	31.50	28.19	34.00	28	1.38	269
30	38.75	2.13	3.50	32.75	33.75	30.19	36.00	28	1.38	303
32	41.75	2.25	3.63	35.00	36.00	32.19	38.50	28	1.63	375
34	43.75	2.31	3.68	37.00	38.00	34.19	40.50	32	1.63	401
36	46.00	2.38	3.75	39.25	40.25	36.19	42.75	32	1.63	452
38	48.75	2.38	3.75	41.75	42.25	38.19	45.25	32	1.63	528
40	50.75	2.50	3.88	43.75	44.25	40.19	47.25	36	1.63	573
42	53.00	2.63	4.00	46.00	47.00	42.19	49.50	36	1.63	648
44	55.25	2.63	4.00	48.00	49.00	44.19	51.75	40	1.63	688
46	57.25	2.68	4.06	50.00	51.00	46.19	53.75	40	1.63	733
48	59.50	2.75	4.13	52.25	53.50	48.19	56.00	44	1.63	799
50	61.75	2.75	4.13	54.25	55.50	50.19	58.25	44	1.88	827
52	64.00	2.88	4.25	56.50	57.50	52.19	60.50	44	1.88	922
54	66.25	3.00	4.38	58.75	59.75	54.19	62.75	44	1.88	1024
60	73.00	3.13	4.50	65.25	66.00	60.19	69.25	52	1.88	1253
66	80.00	3.38	4.88	71.50	73.00	66.19	76.00	52	1.88	1623
72	86.50	3.50	5.00	78.50	79.50	72.19	82.50	60	1.88	1922
84	99.75	3.88	5.38	90.50	92.50	84.19	95.50	64	2.13	2279
96	113.25	4.25	5.75	102.75	105.50	96.19	108.50	68	2.38	2586

1. All dimensions are in inches
2. Dimensions identical to AWWA Class E Hub flanges

3. Flanges can be manufactured with Flat Face
4. AWWA Pressure rating: 275 psi at atmospheric temp.
5. Drilling Template per ANSI B16.1

## Sumitec Int'l, Inc

Phone (877)-837-9618 Fax (866) 311-5335 email:sumitecsales@comcast.net

**Large Diameter Flanges Through 260" Can Be Furnished.**